





**DOORS AND WINDOWS**

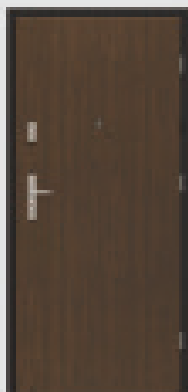

**UP  
2  
WEEKS  
+DELIVERY**

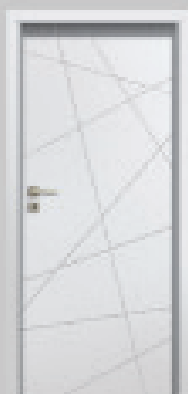

**FAST  
DELIVERY  
2023**


**I EDITION**

door production in 2 weeks +  
delivery on selected products  
Valid from 16.01.2023




POL-SKONE Sp. z o.o.  
ul. Hanki Ordonówny 8; 20-328 Lublin  
phone no.: +48 81 728 58 85; +48 81 744 30 11-13  
fax: +48 81 744 24 89; -48 81 744 39 12  
e-mail: [pol-skone@pol-skone.eu](mailto:pol-skone@pol-skone.eu)  
[www.pol-skone.eu](http://www.pol-skone.eu)

# INTERNAL DOOR DIMENSIONS

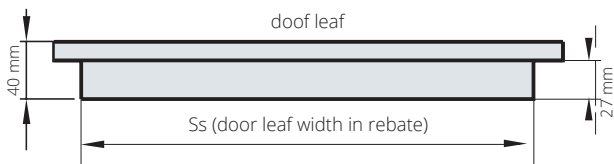

the POL-SKONE rebated door leaves fit all door frames which comply with the Polish industry standards


width (Ss)					height in rebate
618	718	818	918	(mm)	2020 (mm)

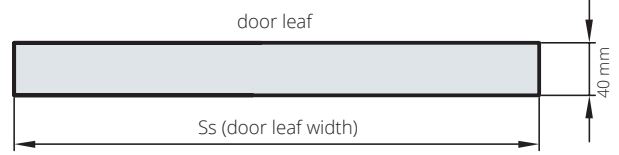

width (Ss)					height
625	725	825	925	(mm)	2040 (mm)


## HANDLE HEIGHT

Height of handle for the rebated door standard height – 1040 mm from the leaf bottom edge





**SYMETRY OVER EVERYTHING**  
NEW STANDARDISED HEIGHT OF HANDLE FOR THE REBATED AND NON-REBATED DOOR SYSTEM



Height of handle for the non-rebated door standard height – 1040 mm from the leaf bottom edge




## Single leaf rebated doors - opening directions





## DUO non-rebated door – opening directions





## HARMONY door – opening directions




## HARMONY door – opening directions



## CLEARANCE BETWEEN LEAF AND FLOOR

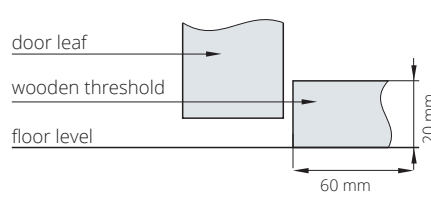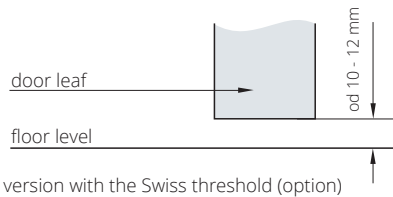

## CONNECTION OF STRIPS



		BASEBOARDS	CAMBIO (p.4)	SUBITO (p.6)	FIORD (p.8)	ARCO (p.10)	IMPULS (p.12)	DECO (p.14)	SEMPRE (p.18)	CERBER PLUS RC2 (p.20)	HARMONY LEAF (p.22)	HARMONY FRAME (p.22)	DIN ADJUSTABLE FRAME (p.23)	FIXAD METAL FRAME (p.24,26)	ADJUSTABLE METAL FRAME (p.25,27)
infill	honeycomb		●	●	●	○	●	●	○	○	●	-	-	-	-
	solid chipboard		●	●	○	○	○	○	○	○	●	-	-	-	-
	POL-SKONE special		○	○	○	●	○	○	●	●	○	-	-	-	-
availability	up to 2 weeks		●	●	●	●	●	●	●	●	●	●	●	●	●
	in stock	●	○	○	○	○	○	○	○	○	●	●	○	○	○
system	rebate		○	○	●	●	●	●	●	●	○	○	●	●	●
	non		●	●	○	○	○	●	○	○	●	●	○	●	●

# RULES FOR THE PROCESSING OF QUICK ORDERS

placing an order for an assortment included in the fast delivery promotion in a separate „order - fast” list via [www.drzwionline.pl](http://www.drzwionline.pl)

ordering the assortment included in the fast processing promotion in standard dimensions (according to the current catalogue Better Interior and configurator [www.drzwionline.pl](http://www.drzwionline.pl) in the „quick order” tab), unless otherwise specified in the flyer

order the assortment included in the quick delivery promotion with ventilation sleeves or undercuts (according to the current catalogue Better interiors catalogue and the configurator [www.drzwionline.pl](http://www.drzwionline.pl) in the “quick order” tab), unless otherwise specified in the flyer

ordering the assortment included in the quick delivery promotion with standard WK, WB, WC locks - specified in the current catalogue Better Interior and the configurator [www.drzwionline.pl](http://www.drzwionline.pl) in the „quick order” tab


ordering the assortment included in the quick delivery promotion with standard glazing, as specified in the current catalogue Better Interior and the configurator [www.drzwionline.pl](http://www.drzwionline.pl) in the “quick order” tab

delivery to distributor provided that the logistic minimum agreed in the commercial contract is met

it is not possible to make corrections to orders placed by „quick order”

## VENTILATION OPTIONS

According to the Ordinance of the Minister of Infrastructure of 12 April 2002 on the technical conditions which must be fulfilled by buildings and their location. (Journal of Laws, 75 of 2002, item 690 as amended, Journal of Laws no 33 of 2003, item 270, Journal of Laws no 109 of 2004, item 1156), Chapter 6, §. 79. “A bathroom, washroom and separate toilet door should be openable outwards and have, subject to § 75 section 2, at least 0.8 m and a height of 2 m within the clear opening of the door frame and - in the lower part - air inlet holes with a total cross-section area not smaller than 0,022 m<sup>2</sup>”

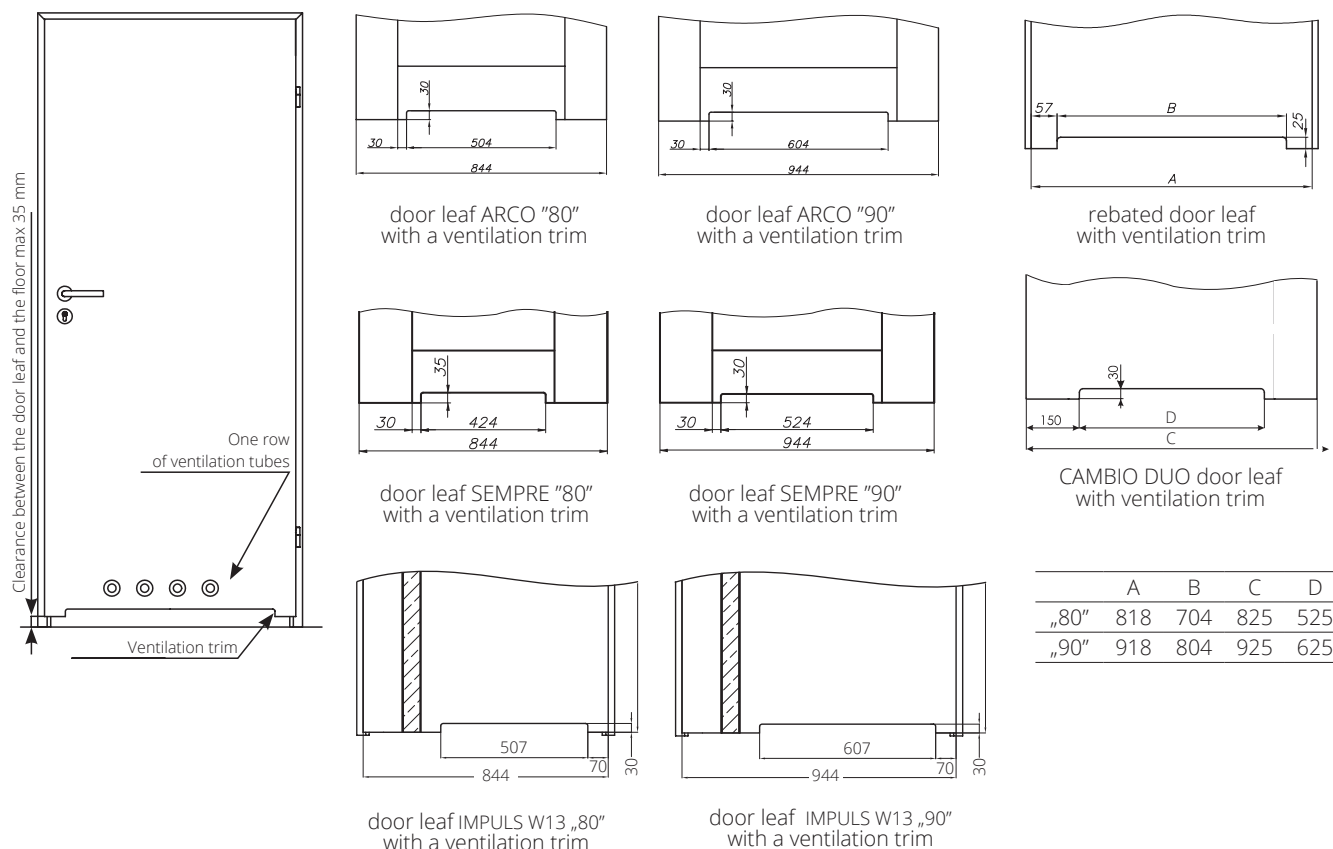

**VENTILATION TUBES**  
made of plastic (a set of 4 pcs) - designed to match the door leaf colour



Addresses of authorised installation teams at [www.pol-skone.eu](http://www.pol-skone.eu)



See videos with installation instructions



Explanation of the meanings of the pictograms



# CAMBIO

The door is constructed with a high quality MDF rail and stile set coated with a surface painted with ecological acrylic paints in RAL 9003 colour.  
The standard infill is a layer with a "honeycomb" structure or a solid chipboard.



CAMBIO doors, 00 version, DIN DUO SYSTEM adjustable frame

standard connection of architraves at an angle of 45° for the DIN DUO door frame



CAMBIO doors, 00 version, DIN DUO SYSTEM adjustable frame





VERSION

00

00 with ventilation trim

REBATED SYSTEM



Adjustable door frame  
**SYSTEM DIN**

symbol	range in mm	PAINTED white 001
ZP2	95-120	
ZP3	120-140	
ZP4	140-160	
ZP5	160-180	

WIDTH

single leaf door				
typ	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„60“	676	646	618	786
„70“	776	746	718	886
„80“	876	846	818	986
„90“	976	946	918	1086
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2053	2043	2020	2113

NON-REBATED SYSTEM



Adjustable door frame  
**SYSTEM DIN DUO**

symbol	range in mm	PAINTED white 001
ZD2	80-85	
ZD3	85-95	
ZD4	95-120	
ZD5	120-140	
ZD6	140-160	
ZD7	160-180	

WIDTH

single leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„60“	690	652	625	792
„70“	790	752	725	892
„80“	890	852	825	992
„90“	990	952	925	1092
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2075	2063	2040	2133

S<sub>s</sub> – door leaf width  
S<sub>d</sub> – door frame external width  
S<sub>o</sub> – door frame installation hole width  
S<sub>op</sub> – architrave external width

H<sub>s</sub> – door leaf height  
H<sub>d</sub> – door frame external height  
H<sub>o</sub> – door frame installation hole height  
H<sub>op</sub> – architrave external height

COLOURS



**001**  
white  
(RAL 9003)

DOOR FRAMES



EQUIPMENT

STANDARD


In-fill: honeycomb or solid chipboard  
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm) or a bathroom lock (spacing: 90 mm)  
hinges: type K – for the DIN system door frame or the concealed DUO satin chrome (‘‘60’’-‘‘80’’ – 2 pcs, ‘‘90’’ – 3 pcs)

DOOR FRAME

adjustable DIN - range ZP2-ZP5, connection of architraves at an angle of 45°  
adjustable DIN DUO - range ZD2-ZD7, connection of architraves at an angle of 45°

ADDITIONAL (available at an extra charge)

door higher by 100 mm  
(third hinge required at extra charge) **+10%**  
third hinge in the door leaf (price per 1 pcs)  
concealed K for width ‘‘60’’-‘‘80’’  
concealed DUO for width ‘‘60’’-‘‘80’’



# SUBITO

NEW

The door is constructed of a wooden rail and stile set topped with two spatial boards covered with surface painted with environmentfriendly RAL and NCS acrylic paints. The standard in-fill is a honeycomb-like layer.



SUBITO doors, 07 version, DIN SYSTEM adjustable frame

standard connection of architraves at an angle of 45° for the DIN DUO door frame



SUBITO doors, 07 version, DIN SYSTEM adjustable frame



VERSION

07

REBATED SYSTEM



#### Adjustable door frame SYSTEM DIN

symbol	range in mm	PAINTED white 001
ZP2	95-120	
ZP3	120-140	
ZP4	140-160	
ZP5	160-180	

#### WIDTH

single leaf door				
typ	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„60”	676	646	618	786
„70”	776	746	718	886
„80”	876	846	818	986
„90”	976	946	918	1086
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2053	2043	2020	2113

NON-REBATED SYSTEM



#### Adjustable door frame SYSTEM DIN DUO

symbol	range in mm	PAINTED white 001
ZD2	80-85	
ZD3	85-95	
ZD4	95-120	
ZD5	120-140	
ZD6	140-160	
ZD7	160-180	

#### WIDTH

single leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„60”	690	652	625	792
„70”	790	752	725	892
„80”	890	852	825	992
„90”	990	952	925	1092
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2075	2063	2040	2133

S<sub>s</sub> – door leaf width  
S<sub>d</sub> – door frame external width  
S<sub>o</sub> – door frame installation hole width  
S<sub>op</sub> – architrave external width

H<sub>s</sub> – door leaf height  
H<sub>d</sub> – door frame external height  
H<sub>o</sub> – door frame installation hole height  
H<sub>op</sub> – architrave external height

#### COLOURS



001  
white  
(RAL 9003)

#### DOOR FRAMES



#### EQUIPMENT

##### STANDARD

In-fill: honeycomb or solid chipboard  
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm) or a bathroom lock (spacing: 90 mm)  
hinges: type K – for the DIN system door frame or the concealed DUO satin chrome (‘‘60”-‘‘80” – 2 pcs, ‘‘90” – 3 pcs)

##### DOOR FRAME

adjustable DIN - range ZP2-ZP5, connection of architraves at an angle of 45°  
adjustable DIN DUO - range ZD2-ZD7, connection of architraves at an angle of 45°

##### ADDITIONAL (available at an extra charge)

door higher by 100 mm  
(third hinge required at extra charge) **+10%**  
third hinge in the door leaf (price per 1 pcs)  
concealed K for width ‘‘60”-‘‘80”  
concealed DUO for width ‘‘60”-‘‘80”



# FIORD

The door is constructed of a wooden rail and stile set topped with two spatial boards covered with surface painted with environmentfriendly RAL and NCS acrylic paints. The standard in-fill is a honeycomb-like layer..



glazing, spacer frame



door leaf profile

FIORD door, 00 version, SYSTEM DIN adjustable door frame



FIORD door, version 00, DOOR FRAME adjustable SYSTEM DIN



#### VERSION

00

01



03

04

#### COLOURS



#### DOOR FRAMES



#### EQUIPMENT


##### STANDARD

white matt 4 mm thick glass  
version 04: white matt tempered 4 mm thick glass  
single-point mortise lock, spacing: 72 mm,  
key-operated, for a cylinder or a bathroom lock  
hinges: type K – for the DIN system door frame, type M – for the metal  
door frame („60“-„80“ – 2 pcs, „90“ – 3 pcs)

##### ADDITIONAL (available at an extra charge)


ventilation trim





# ARCO

The door is constructed with a high quality MDF rail and stile set coated with the ECO TOP surface finish. Rail and stile set - vertical wood grain, cross rails and panel - horizontal wood grain. The top and the bottom edge of the leaf is secured with foil.



rail and stile set - vertical wood grain, cross rails and panel - horizontal wood grain



panels, glazing

ARCO door, W02 version SYSTEM DIN adjustable door frame



ARCO door, W25 version DIN adjustable door frame



#### VERSION

W02P

W2S

W02

ECO TOP

LAMISTONE, SILKSTONE



#### VERSION


W03P

W3S

W03

ECO TOP

LAMISTONE, SILKSTONE

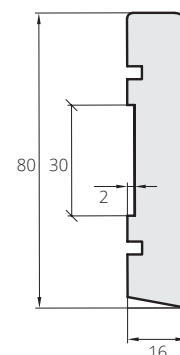

#### COLOURS

<b>ECO TOP</b>	<b>120</b> white	<b>132</b> walnut	<b>135</b> English oak	<b>141</b> SaliNas oak	<b>161</b> halif oak
<b>LAMISTONE CPL</b>	<b>242</b> grey elm V	<b>244</b> black	<b>SILKSTONE</b>	<b>276</b> Polish oak	

AVAILABLE IN STOCK

#### BASEBOARDS

colour black 244, white 258, polish oak 276  
merbau Royal 295, width 80 mm



Baseboard made of moisture-proof plate

#### DOOR FRAMES



adjustable  
system DIN

fixed metal door  
frame

adjustable  
metal door frame

#### EQUIPMENT


##### STANDARD

white/brown matt 4 mm glass  
single-point mortise lock, spacing: 72 mm , key-operated, for a cylinder or a bathroom lock  
hinges: type B – for the DIN system door frame, type M - for the metal door frame („60°-90° – 3 pcs)  
door closer is not available  
drop seal is not available

##### ADDITIONAL (available at an extra charge)

ventilation trim  
ventilation tubes: 258 white, 132 walnut,  
135 English oak, 141 Salinas oak, 161 halif oak,  
242 grey elm, 276 Polish oak





# IMPULS



IMPULS door, version W06, adjustable SYSTEM DIN door frame

The door is constructed of a wooden rail and stile set topped with two plain HDF boards with a LAMISTONE CPL, SILKSTONE surface finish. The standard in-fill is a honeycomb-like layer.



spacer frame profile



door frame



IMPULS door, W13 version, SYSTEM DIN adjustable door frame




**VERSION** W01 W02 W03 W05 W06

SILKSTONE  
LAMISTONE CPL





**VERSION** W07 W12 D1 W12 W13

SILKSTONE  
LAMISTONE CPL

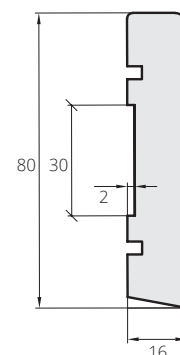

## COLOURS



**AVAILABLE IN STOCK**

## BASEBOARDS

colour black 244, white 258, polish oak 276  
merbau Royal 295, width 80 mm



Baseboard made of moisture-proof plate

## DOOR FRAMES



DIN system  
adjustable frame



fixed metal frame



metal adjustable  
frame

## EQUIPMENT

### STANDARD

white/brown matt or transparent 4 mm glass  
white/brown matt tempered glass version W03, W05, W13  
single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)  
hinges: type K – for the DIN system door frame, type M – for the metal door frame r the concealed DUO satin nickel ("60"- "80" – 2 pcs, "90" – 3 pcs)

### ADDITIONAL (available at an extra charge)

ventilation tubes: 258 white, 276 Polish oak 295 merbau Royal, („60“- „90" - 4 pcs.)  
ventilation trim (only „80" and „90")





drzwi DECO, wzór 00, DOOR FRAME adjustable metal door frame

# DECO

The door is made of rail and stile set covered with two HDF boards coated with 0,2 mm CPL laminate. The standard in-fill is a honeycomb-like layer or optionally solid chipboard.



spacer frame profile



door frame




IMPULS door, W13 version, SYSTEM DIN adjustable door frame



**VERSION** 00

LAMINATED  
CPL 0,2 mm

LAMINATED  
CPL  
0,2 mm

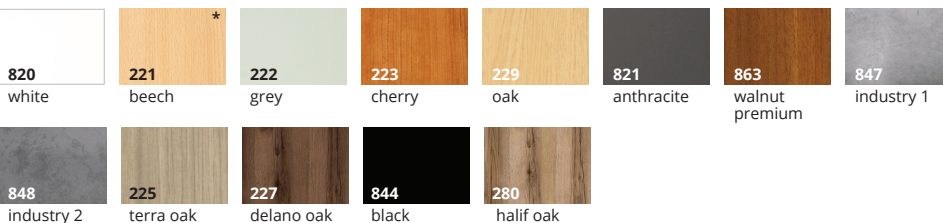

\* available upon consultation with the sales department


## DOOR FRAMES



fixed metal door  
frame



adjustable  
metal door frame



fixed metal door  
frame



adjustable  
metal door frame

## EQUIPMENT


### STANDARD

single-point mortise lock, spacing: 72 mm (rebated system) or magnetic mortise lock (non-rebated system), key-operated (spacing: 90 mm), for a cylinder (spacing: 85 mm) or a bathroom lock (spacing: 90 mm)  
hinges: type M – for the metal door frame or the concealed DUO satin nickel („60” – „80” – 2 pcs, „90” – 3 pcs)

### ADDITIONAL (available at an extra charge)

ventilation trim  
solid chipboard in-fill (third hinge recommended)  
third hinge in the door leaf or adjustable pivot hinge:  
(price per 1 pcs):  
type M for a width of „80”  
concealed DUO type for a width of „80”





for leaves  
with ventilation option



# SEDO

NEW

The door is constructed with a high quality MDF rail and stile set coated with a UNI MAT PLUS surface

SEDO doors, 00 version, DIN SYSTEM adjustable frame



SEDO doors, 00 version, DIN SYSTEM adjustable frame



VERSION 07

REBATED SYSTEM



Adjustable door frame  
**SYSTEM DIN**

symbol	range in mm	PAINTED white 001
ZP2	95-120	
ZP3	120-140	
ZP4	140-160	
ZP5	160-180	

WIDTH

single leaf door				
typ	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	846
„80”	876	846	818	946
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2053	2043	2020	2093

NON-REBATED SYSTEM



Adjustable door frame  
**SYSTEM DIN DUO**

symbol	range in mm	PAINTED white 001
ZD2	80-85	
ZD3	85-95	
ZD4	95-120	
ZD5	120-140	
ZD6	140-160	
ZD7	160-180	

WIDTH

single leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„60”	690	652	625	792
„70”	790	752	725	892
„80”	890	852	825	992
„90”	990	952	925	1092
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2075	2063	2040	2133

S<sub>s</sub> – door leaf width  
S<sub>d</sub> – door frame external width  
S<sub>o</sub> – door frame installation hole width  
S<sub>op</sub> – architrave external width

H<sub>s</sub> – door leaf height  
H<sub>d</sub> – door frame external height  
H<sub>o</sub> – door frame installation hole height  
H<sub>op</sub> – architrave external height

COLOURS



001  
white  
(RAL 9003)

DOOR FRAMES



EQUIPMENT

STANDARD


version W00: panel thickness 12 mm  
single-point mortise lock, spacing: 72 mm, key-operated, for a cylinder or a bathroom lock  
hinges: type B silver – for the DIN system door frame, or concealed DUO chrome sanit („70”-80” – 3 pcs)  
door closer is not available  
drop seal is not available

DOOR FRAME

adjustable DIN - range ZP2-ZP5, connection of architraves at an angle of 45°  
adjustable DIN DUO - range ZD2-ZD7, connection of architraves at an angle of 45°

ADDITIONAL (available at an extra charge)

ventilation trim



# SEMPRE

The door is constructed of a wooden rail and stile set topped with two plain HDF boards with a LAMISTONE CPL, SILKSTONE surface finish. The rail and stile set comes with vertical or horizontal wood grain in case of version H leaves; on panels and cross rails depending on the pattern, horizontal (W02-W02A, W03-W03A).



glazing

SEMPRE door, W02 version, SYSTEM DIN adjustable door frame



SEMPRE door, W02 version (door on the left side), SYSTEM DIN adjustable door frame, W2S version (door on the right side)







**VERSION** W02P W02 W02S1 W02S2 W02S3 W02S4 W02A



**VERSION** W03P W03 W03S1 W03S2 W03S3 W03S4 W03A

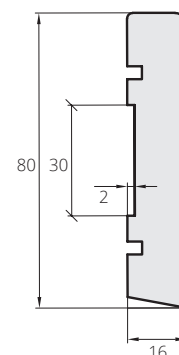

## COLOURS



## AVAILABLE IN STOCK

### BASEBOARDS

colour black 244, white 258, polish oak 276  
merbau Royal 295, width 80 mm



Baseboard made of moisture-proof plate

## DOOR FRAMES



adjustable  
system DIN

fixed metal door  
frame

adjustable  
metal door frame


## EQUIPMENT

### STANDARD

white/brown 4 mm thick glass  
single-point mortise lock, spacing: 72 mm, key-operated, for a cylinder or a bathroom lock  
hinges: type K brushed nickel – for the DIN system door frame, type M – for the metal door frame („60“-„80“ – 2 pcs, „90“ – 3 pcs)  
door closer is not available  
drop seal is not available

### ADDITIONAL (available at an extra charge)

ventilation tubes: 258 white, 276 Polish oak, 295 merbau Royal („60“ - 3 pcs, „70“ - „90“ - 4 pcs)  
ventilation trim (tylko „80“ i „90“)

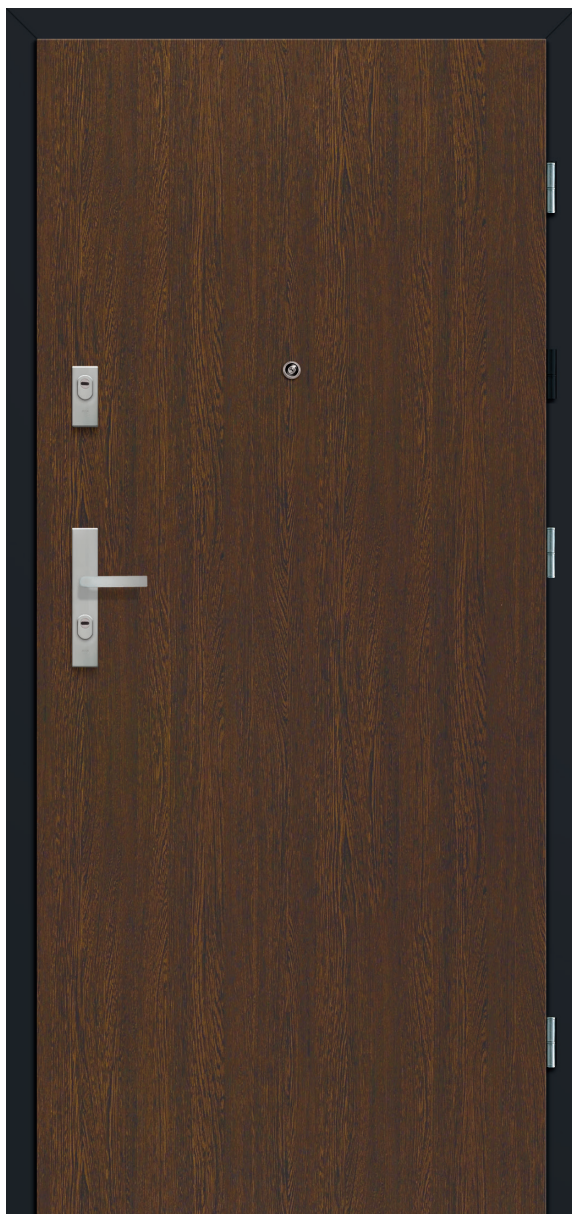

CERBER PLUS RC2 door, 00 version, RAL 9005 fixed metal door frame RAL 9005

# CERBER PLUS RC2 with metal door frame

Interior entrance door leading from corridors or staircases to e.g. flats in multi-family buildings or rooms in public utility buildings.

Door with a fixed and adjustable wooden door frame or metal door frame. Door leaf constructed of a wooden rail and stile set topped with two HDF boards. The in-fill is made of perforated board, optionally solid board or special POLSKONE structure (37dB version).  
Rated leaf thickness: 46 mm.

## acoustic insulation:

class D1 – 30, D2 – 30, class  $R_w=37$  dB (POL-SKONE chipboard in-fill, door with drop seal)

burglary resistance: class RC2 acc. PN-EN 1627:2012

mechanical class 3 PN-EN 1192:2001

ITB technical approval: ITB-KOT-2019/0742 edition 1




strip type lock



strip type lock





CERBER PLUS RC2 door, 00 version, RAL 9005 fixed metal door frame RAL 9005

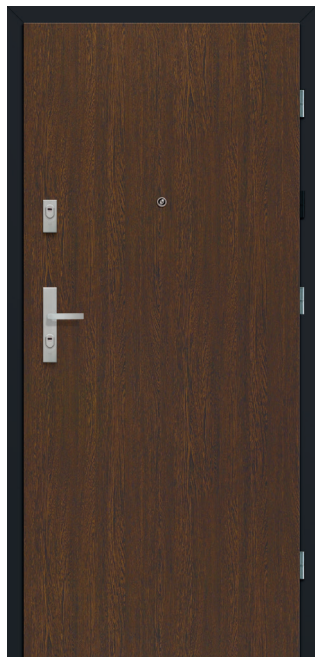

**VERSION** 37 dB 00 with metal door frame

UNI MAT PLUS  
SILKSTONE

## COLOURS

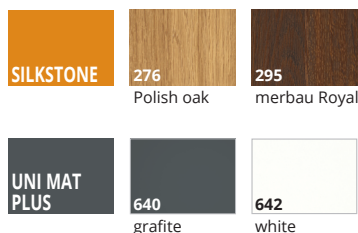


stainless steel threshold

## DOOR FRAME

Metal door frame  
in white (RAL 9003), grafite (RAL 7024), black (RAL 9005)


WIDTH [mm]			
	S <sub>c</sub>	S <sub>d</sub>	S <sub>o</sub>
„90“	1017	971	987
„90“ plus	1027	981	997



S<sub>d</sub> – door frame external width  
S<sub>o</sub> – installation hole width  
S<sub>c</sub> – total door frame width

H<sub>d</sub> – door frame external height  
H<sub>o</sub> – installation hole height  
H<sub>c</sub> – total door frame height

HEIGHT [mm]		
H <sub>c</sub>	H <sub>d</sub>	H <sub>o</sub>
2078	2055	2063



## EQUIPMENT

### STANDARD

adjustable screwed-in pivot hinges – 3 pcs  
strip type lock (spacing: 72 mm) with a four-point locking bolt system  
metal door frame in white (RAL 9003), grafite (RAL 7024), black (RAL 9005)  
security bolts – 3 pcs  
silver viewfinder Ø15  
oak threshold


### DIMENSIONS

doors with a metal door frame:  
1017x2078 mm  
Version „90 plus“ (allowing to get the clear opening of min. 900 mm when the door leaf is opened at an angle of 90°) 1027x2078 mm

### ADDITIONAL (available at an extra charge)


complete set of class 6 nickel cylinders  
drop seal (without a threshold)  
GARDA handle in the colour of black  
GARDA upper rosette in the colour of black  
WILKA cylinder in the colour of black  
change of oak threshold to stainless steel threshold





# CONCEALED DOOR FRAME AND HARMONY LEAF POL-SKONE SYSTEM

FOR SINGLE LEAF DOOR

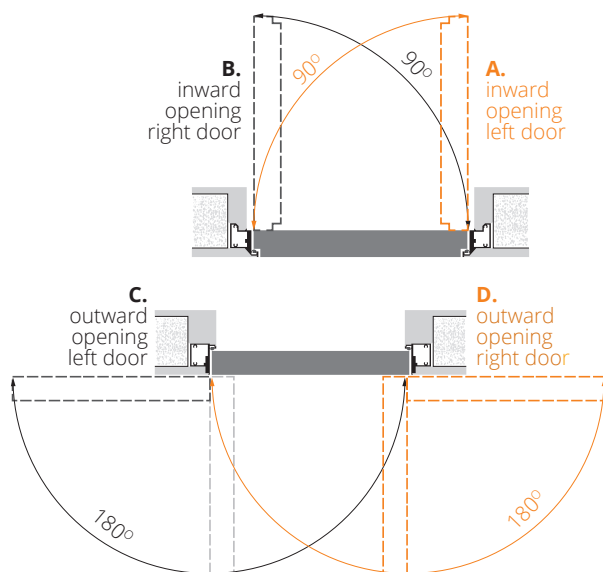

WIDTH				HEIGHT	
door dimension	S <sub>d</sub> *	S <sub>d</sub> **	S <sub>o</sub>	H <sub>d</sub>	H <sub>o</sub>
„70“	796	793	805	2092*	2100*
„80“	896	893	905	2082**	2090**
„90“	996	993	1005		

\* inward opening door

\*\* outward opening door

S<sub>d</sub> - door frame external width  
S<sub>o</sub> - installation hole width  
H<sub>d</sub> - door frame external height  
H<sub>o</sub> - installation hole height

## SPECIFICATIONS

Mechanical resistance requirements class 2, i.e. average service conditions.

## LEAF STRUCTURE

Non-rebated system leaf (opened outwards) or with a notch (opened inwards). The door leaf structure consists of a rail and stile set made of coniferous wood, topped with HDF boards on both sides. The leaf in-fill consists of solid chipboard. The rated thickness of the door leaf is 40 mm..

The door leaf is designed in such a way that it can be installed flush with the door frame surface

## DOOR LEAF FINISH

Prime-coated surface for DIY painting.

## DOOR FRAME COLOURS

Concealed door frame for inwards or outwards opened doors. Made from raw aluminium for do-it-yourself painting in the colour of the wall.

## ACCESSORIES

Standard equipment:  
concealed hinge (adjustable in 3 planes) - satin chrome colour - 2 pcs (honey comb) or 3 pcs (solid chipboard)  
key-operated, cylinder or bathroom type magnetic lock

## DOOR LEAF FOR THE HARMONY DOOR FRAME AVAILABLE IN STOCK

leaf price leaf dimensions	prime-coated surface for DIY painting.
80" wide leaf („80 „x2040/2050 mm) honeycomb	
80" wide („80 „x2040/2050 mm) leaf, honeycomb, solid chipboard	

## HARMONY DOOR FRAME FOR SINGLE LEAF DOOR AVAILABLE IN STOCK

door leaf dimensions and the number of hinges	for DIY painting (untreated aluminium)	RAL 9003 white hinges RAL 9005 black hinges
„80" x 2040/2050 mm (2 concealed hinges)		
„80" x 2040/2050 mm (3 concealed hinges)		

## DOOR LEAF FOR THE HARMONY DOOR FRAME AVAILABLE IN 2 WEEKS

leaf price leaf dimensions	Prime-coated surface for DIY painting.
leaf width „70" („70" x 2040/2050 mm) solid chipboard, additional concealed hinge	
leaf width „90" („90" x 2040/2050 mm) solid chipboard	
leaf width „70" („70" x 2040/2050 mm) solid chipboard, additional concealed hinge + ventilation trim	
leaf width „90" („90" x 2040/2050 mm) solid chipboard + ventilation trim	

## HARMONY DOOR FRAME FOR SINGLE LEAF DOOR AVAILABLE IN 2 WEEKS

door leaf dimensions and the number of hinges	for DIY painting (untreated aluminium)
„70" x 2040/2050 mm (3 concealed hinges)	
„90" x 2040/2050 mm (3 concealed hinges)	

# NOTE

## HARMONY FRAMES & DOORS IN STOCK


### HARMONY LEAF

- width „80"
- left or right
- inward or outward opening
- honey comb in-fill (2 concealed hinges)
- solid chipboard (3 concealed hinges)
- prime-coated surface for DIY painting
- WK magnetic lock

### HARMONY DOOR FRAME

- width „80"
- left or right
- inward or outward opening
- COLOURS: for DIY painting  
(untreated aluminium), PAINTED RAL 9003 or RAL 9005

# DIN SYSTEM ADJUSTABLE door frame

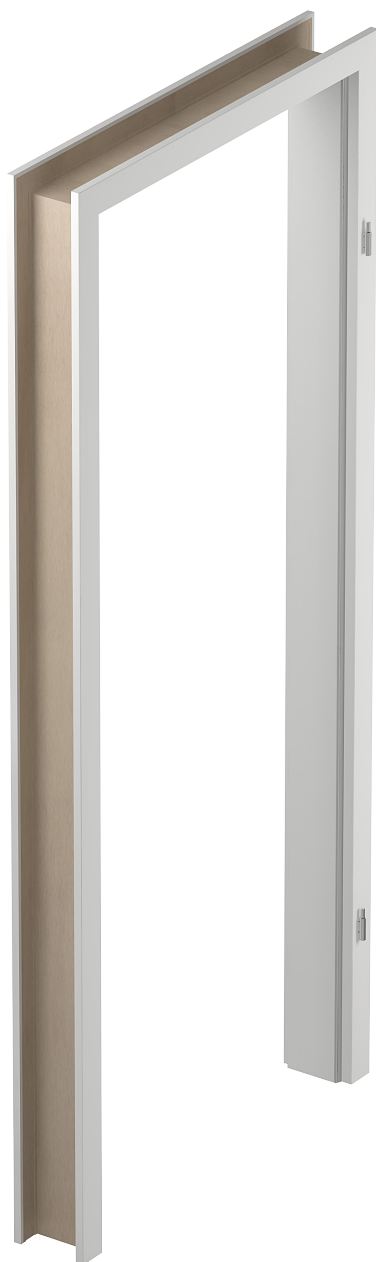

single leaf door

ECO TOP

LAMISTONE CPL

SILKSTONE

PAINTED

white 001 (RAL 9003)

ZP1A 75-85

ZP1B 85-95

ZP2 95-120

ZP3 120-140

ZP4 140-160

ZP5 160-180

ZP6 180-200

ZP7 200-220

ZP8 220-240

ZP9 240-260

ZP10 260-280

ZP11 280-300

Width

single leaf door

typ	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>opA</sub>
„60“	676	646	618	746
„70“	776	746	718	846
„80“	876	846	818	946
„90“	976	946	918	1046


Height

H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>opA</sub>
2053	2043	2020	2093

S<sub>s</sub> - door leaf width  
S<sub>d</sub> - door frame external width  
S<sub>o</sub> - installation hole width  
S<sub>op</sub> - architrave external width

H<sub>s</sub> - door leaf height  
H<sub>d</sub> - door frame external height  
H<sub>o</sub> - installation hole height  
H<sub>op</sub> - architrave external height

VERSION A: 60 mm (not applicable to the painted door)  
VERSION B: 80 mm

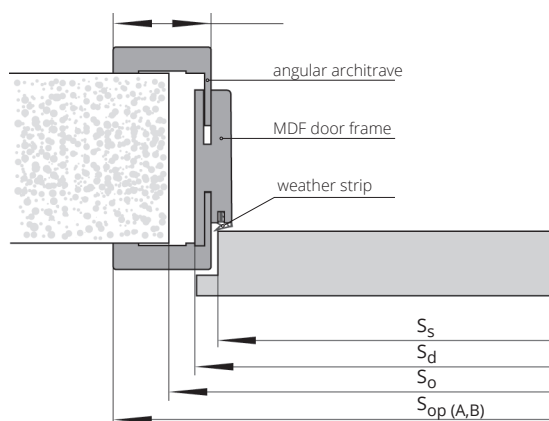



Approval no. AT-15-9775/2016

# POL-SKONE SYSTEM METAL **FIXED** door frame



## COLOURS

Powder-coated door frame  
Standard colours: white (RAL 9016), white (RAL 9003),  
grey (RAL 7047), brown (RAL 8014), beige (RAL 1001),  
graphite (RAL 7024), black (RAL 9005).

	single leaf door
door frame type	„80“÷„90“
FD14 small	
FD12 big	



Width FD14			
single leaf door			
Typ	S <sub>o</sub>	S <sub>d</sub>	S <sub>c</sub>
„80“	873	833	897
„90“	973	933	997
Height		H <sub>d</sub> H <sub>o</sub> H <sub>c</sub>	
		2036 2046 2068	

S<sub>d</sub> - door frame external width  
S<sub>o</sub> - installation hole width  
S<sub>c</sub> - total door frame width

Width FD12			
single leaf door			
Typ	S <sub>o</sub>	S <sub>d</sub>	S <sub>c</sub>
„80“	881	871	897
„90“	981	971	997
Height		H <sub>d</sub> H <sub>o</sub> H <sub>c</sub>	
		2055 2060 2068	

H<sub>d</sub> - door frame external height  
H<sub>o</sub> - installation hole height  
H<sub>c</sub> - total door frame height

Door frame made of the highest quality 1.5 mm thick steel plate (FD12) and 1.5 mm thick (FD14)

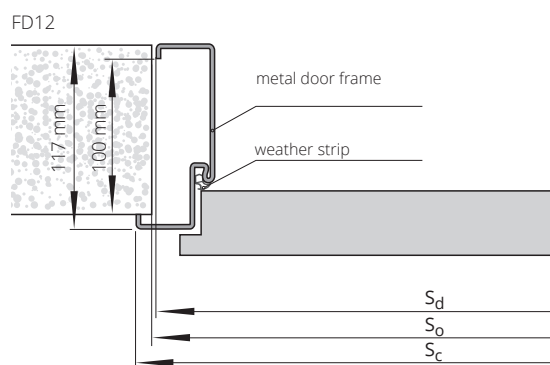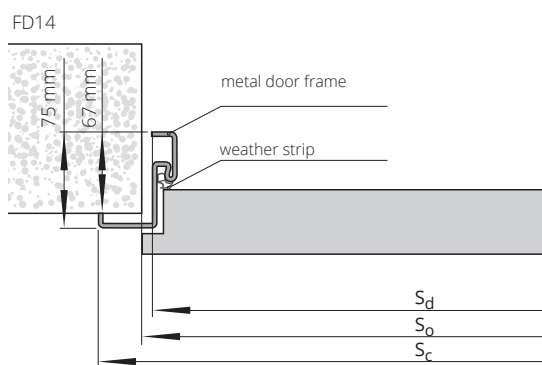



Approval no. AT-15-9775/2016

# POL-SKONE SYSTEM METAL **ADJUSTABLE** door frame



## COLOURS


Powder-coated door frame.

STANDARD COLOURS: WHITE (RAL 9016), WHITE (RAL 9003), GREY (RAL 7047), BROWN (RAL 8014), BEIGE (RAL 1001), GRAPHITE (RAL 7024), BLACK (RAL 9005).

single leaf door

symbol	range w mm	„80“÷„90“
ZO1	95-125	
ZO2	125-155	
ZO3	155-185	
ZO4	185-215	
ZO5	215-245	
ZO6	245-275	
ZO7	275-305	
ZO8	305-335	
ZO9	335-365	

Door frame made of the highest quality 1.5 mm thick steel plate.

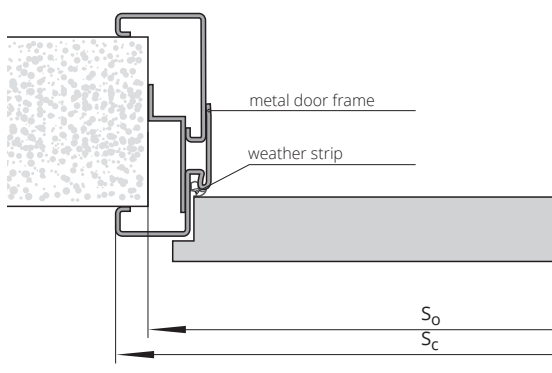

## WIDTH

single leaf door		
typ	S <sub>0</sub>	S <sub>c</sub>
„80“	889	917
„90“	989	1017
Height	H <sub>0</sub>	H <sub>c</sub>
	2065	2078

S<sub>0</sub> - installation hole width  
S<sub>c</sub> - total door frame width

H<sub>0</sub> - installation hole height  
H<sub>c</sub> - total door frame height





Approval no. AT-15-9775/2016

# POL-SKONE SYSTEM METAL DUO **FIXED** door frame




**NOTE! The DUO metal frame price includes the DUO concealed hinges.**

## COLOURS

Powder-coated door frame.  
Standard colours: white (RAL 9016), white (RAL 9003), grey (RAL 7047), brown (RAL 8014), beige (RAL 1001), graphite (RAL 7024), black (RAL 9005). O



single leaf door			
symbol	range w mm	„80“	„90“
F93	101		
	number of concealed hinges	2 pcs	3 pcs

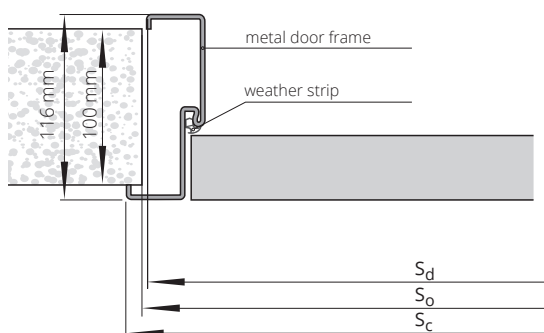

## WIDTH

single leaf door			
typ	S <sub>o</sub>	S <sub>d</sub>	S <sub>c</sub>
„80“	885	875	901
„90“	985	975	1001
HEIGHT			
	H <sub>o</sub>	H <sub>c</sub>	H <sub>d</sub>
	2080	2088	2075

S<sub>d</sub> - door frame external width  
S<sub>o</sub> - installation hole width  
S<sub>c</sub> - total door frame width

H<sub>d</sub> - door frame external height  
H<sub>o</sub> - installation hole height  
H<sub>c</sub> - total door frame width



Approval no. AT-15-9775/2016

# POL-SKONE SYSTEM METAL DUO **ADJUSTABLE** door frame



**NOTE! The DUO metal frame price includes the DUO concealed hinges.**


## COLOURS

Powder-coated door frame.  
Standard colours: white (RAL 9016), white (RAL 9003), grey (RAL 7047), brown (RAL 8014), beige (RAL 1001), graphite (RAL 7024), black (RAL 9005)..



single leaf door

symbol	range w mm	„80“	„90“
F71	110-140		
F72	140-170		
F73	170-200		
F74	200-230		
F75	230-260		
F76	260-290		
F77	290-320		
F78	320-350		
F79	350-380		
number of concealed hinges		2 pcs	3 pcs

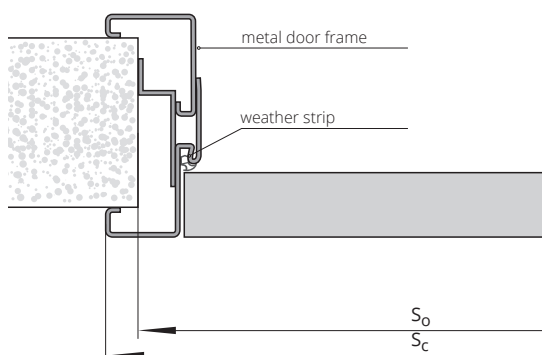

## WIDTH

single leaf door		
typ	S <sub>c</sub>	S <sub>0</sub>
„80“	921	893
„90“	1021	993
HEIGHT	H <sub>0</sub>	H <sub>c</sub>
	2085	2098

S<sub>0</sub> - installation hole width  
S<sub>c</sub> - total door frame width

H<sub>0</sub> - installation hole height  
H<sub>c</sub> - total door frame height



# OTHER CATALOGUES

Interior door catalogue and windows catalogue  
available in separate publications.

